

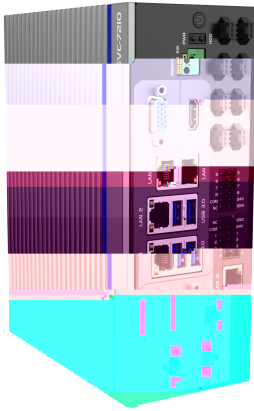
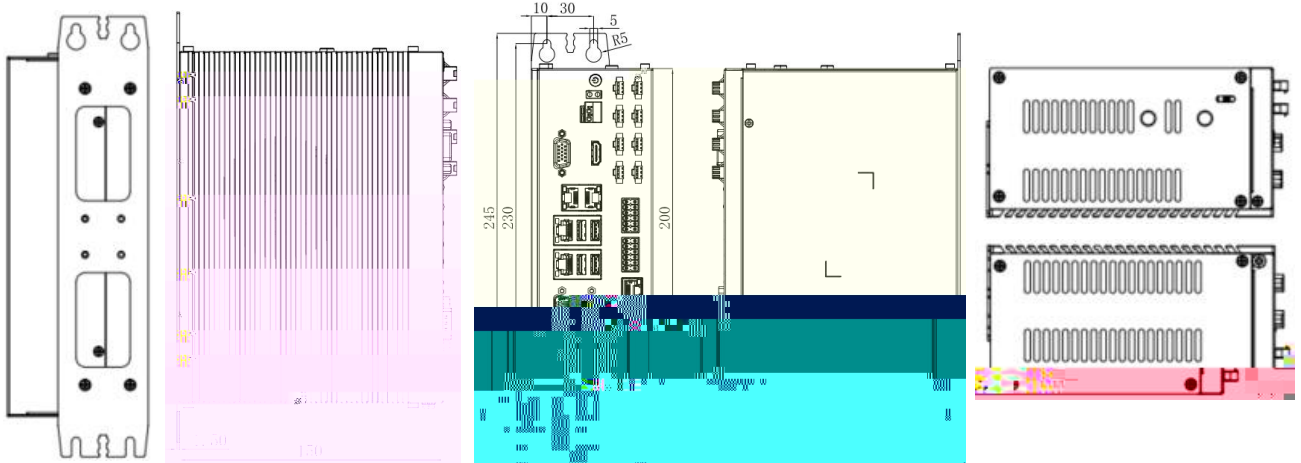


EVC-7213

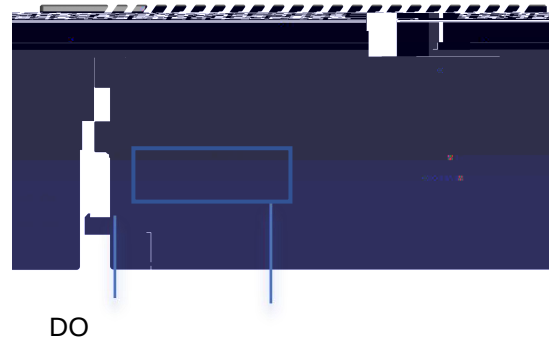

- Intel LGA1151 6/8/9 i3/i5/i7/i9
CPU, TDP 65W
- 6 Intel
- VGA+HDMI
- 2xRS232/422/485
- 4xUSB3.0, 1xUSB2.0 Type A(for)
- 8DI 8DO NPN/PNP
- 8 PWM
- DC IN 12~24V

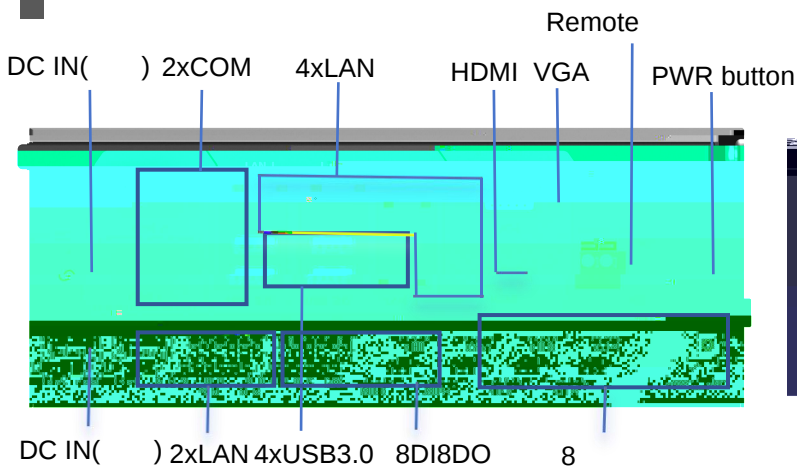

		Intel LGA1151	6/8/9	i3/i5/i7/i9 CPU, TDP	65W
		Z390			
	BIOS	AMI UEFI/Legac	BIOS		
		2	DDR4 2133/2400/2666 MH	SO-DIMM	up to 64GB
		Win7/Win10/Linu			
I/O	USB	4	USB3.0, 1	USB2.0 T	pe A(for)
	COM	2	:	RS232/422/485(DB9),	
	LED	1	Power, 1	HDD	
	DIDO	8DI8DO	NPN/PNP		
	PWM	8	PWM	8	180W
	Remote	1	2PIN		
	PCIe/M.2/Mini-PCIe	1	Mini-PCIe	SIM	4G/5G)
	Graphics Processor	Intel CPU	(	CPU	)
	Interface	VGA+HDMI			
	SATA/M.2/mSATA	1	mSATA,		
		1	M.2 2280 NVMe SSD		
	LAN IC	6	i210AT		
	Interface	6	RJ45		
	Power Input	12V	24V, DC in		
			24V	DC in	
	Power Interface	2Pin			
	Watchdog Timer	1	to 255 sec./min.	per step	
	Dimensions	78mm(W)	200mm(H)	150mm(D)	
	Mounting	/			
	Operating Temp.	-10	50		
	Storage Temp.	-40	85		
	Humidit	95%@40	C(non-condensing)		
	Shock	With SSD: 15G,	IEC 60068-2-27,	half sine, 11ms duration	
	Vibration	With SSD:2Grms,	IEC 60068-2-64,	random	5 500H 1 hr/a is



			LAN	USB3.0	COM		DIDO	
EVC-7213	Z390	2	6	4	2	1mSATA, 1M.2	8/8	8



EVC-7213	EVC-7213	1
NA	/	1